
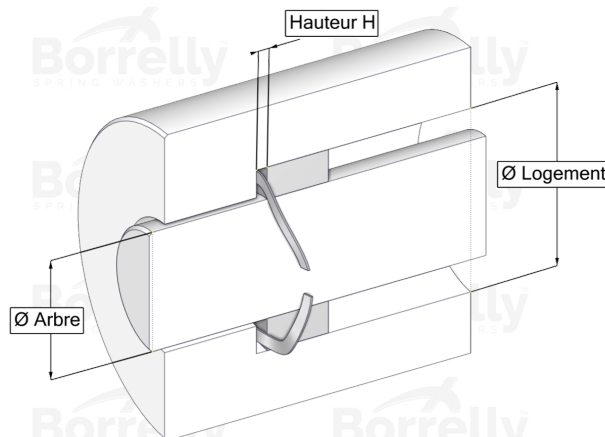


BORRELLY ONDUFIL WAVE SPRINGS

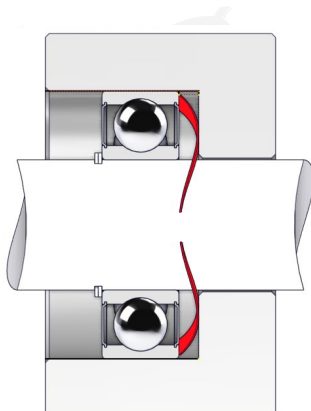

TECHNICAL SHEET STANDARD RANGE SINGLE TURN GAP C75 TYPE STEEL FOR BEARING

| REFERENCE BORRELLY | OU62 |
|--|-----------------------|
| Outer diameter of the bearing (mm) | 62 |
| Borrelly part code | RD0624U140060XT |
| Material | Carbon Steel type C75 |
| Standard references for the bearing mounting on outer ring | 6007 6206 6305 |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 62 |
| Clears Shaft Ø max (for application other than bearing preload) (mm) | 53.4 |
| Approximate wire section (mm) | 4,0 x 0,60 |
| Number of waves | 4 |
| Approximate free height (mm) | 4.1 |
| Recommended installation height (mm) | 2.35 |
| Approximate spring rate (N/mm) | 91 |