
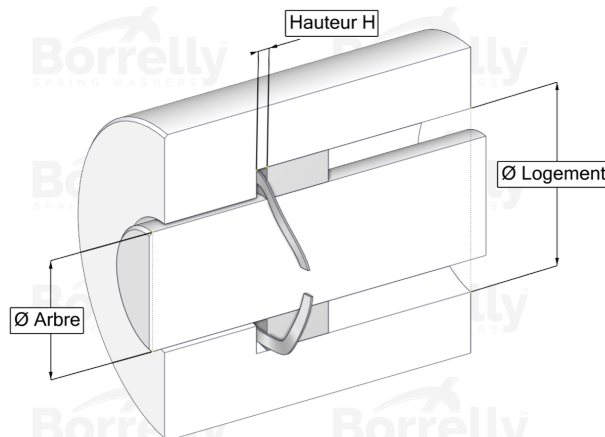


# BORRELLY ONDUFIL WAVE SPRINGS

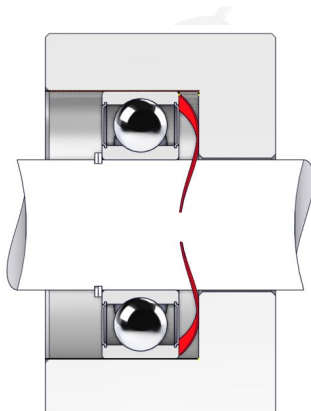

## TECHNICAL SHEET STANDARD RANGE SINGLE TURN GAP C75 TYPE STEEL FOR BEARING

| REFERENCE BORRELLY   | OU75                  |
|--|-----------------------|
| Outer diameter of the bearing (mm)                                       | 75                    |
| Borrelly part code   | RD0754U155070XT       |
| Material   | Carbon Steel type C75 |
| Standard references for the bearing mounting on outer ring               | 6009                  |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 75                    |
| Clears Shaft Ø max (for application other than bearing preload) (mm)     | 63.4                  |
| Approximate wire section (mm)  | 5,5 x 0,70            |
| Number of waves  | 4                     |
| Approximate free height (mm)   | 5.0                   |
| Recommended installation height (mm)                                     | 2.80                  |
| Approximate spring rate (N/mm)   | 92                    |