


BORRELLY ONDUFIL WAVE SPRINGS





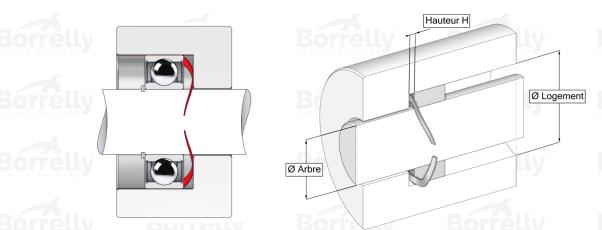

TECHNICAL SHEET STANDARD RANGE SINGLE TURN GAP 17-7PH STAINLESS STEEL FOR BEARING

REFERENCE BORRELLY	OU80S
Outer diameter of the bearing (mm)	80
Borrelly part code	RD0804U155070I68
Material	Stainless steel 17-7 Ph 1.4568
Standard references for the bearing mounting on outer ring	6010 6208 6307 6405
Operates in Bore \emptyset min (for application other than bearing preload) (mm)	80.00 Borrelly Borrell
Clears Shaft Ø max (for application other than bearing preload) (mm)	68.4
Approximate wire section (mm)	5,5 x 0,70
Number of waves	4
Approximate free height (mm)	5.7
Recommended installation height (mm)	2.80
Approximate spring rate (N/mm)	76

Borrelly
Borrelly