


BORRELLY ONDUFIL WAVE SPRINGS





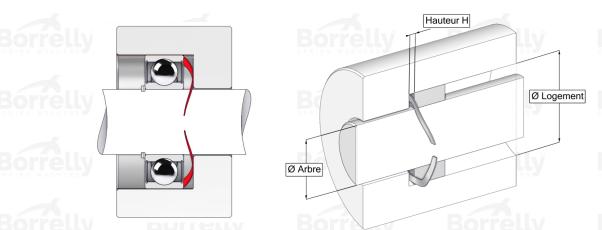

TECHNICAL SHEET STANDARD RANGE SINGLE TURN GAP 17-7PH STAINLESS STEEL FOR BEARING

| REFERENCE BORRELLY | OU80S |
|--|--------------------------------|
| Outer diameter of the bearing (mm) | 80 |
| Borrelly part code | RD0804U155070I68 |
| Material System Book States St | Stainless steel 17-7 Ph 1.4568 |
| Standard references for the bearing mounting on outer ring | 6010 6208 6307 6405 |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 80.00 Borrelly Borrell |
| Clears Shaft Ø max (for application other than bearing preload) (mm) | 68.4 |
| Approximate wire section (mm) | 5,5 x 0,70 |
| Number of waves | 4 |
| Approximate free height (mm) | 5.7 |
| Recommended installation height (mm) | 2.80 |
| Approximate spring rate (N/mm) | 76 |
| | |

Borrelly
Borrelly