


# BORRELLY WAVE WASHERS

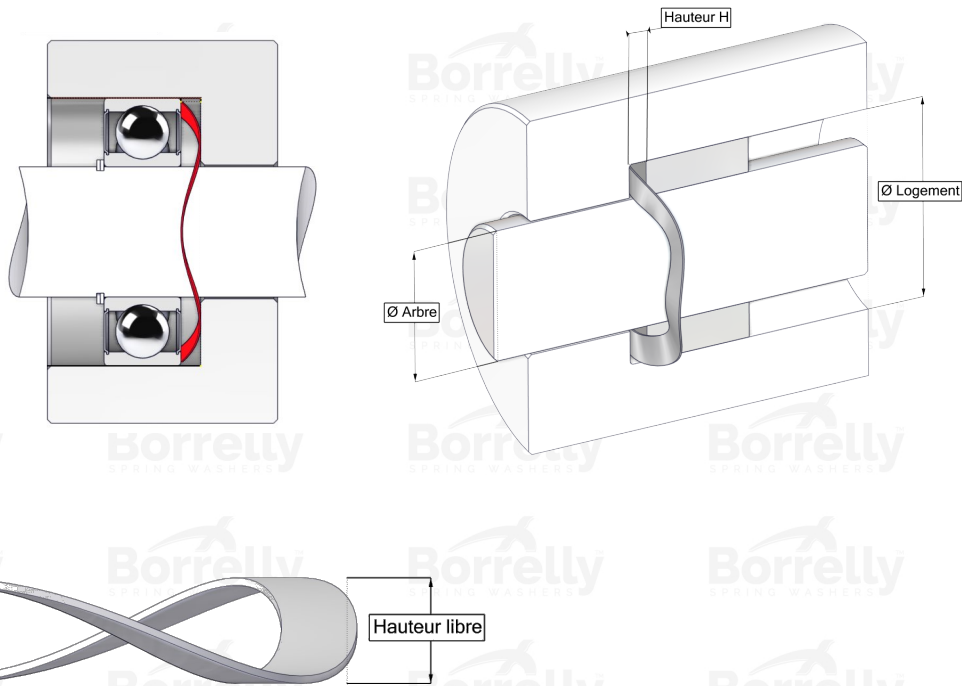

## TECHNICAL SHEET CN STANDARD RANGE C75S STEEL FOR BEARING

| REFERENCE BORRELLY   | CN35NF                   |
|--|--------------------------|
| Outer diameter of the bearing (mm)                                       | 35                       |
| Borrelly part code   | PCD034024025XT           |
| Material   | Carbon Steel C75S 1.1248 |
| Standard references for the bearing mounting on outer ring               | 6003 6202 6300           |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 35                       |
| Clears Shaft Ø max (for application other than bearing preload) (mm)     | 22.5                     |
| Material thickness ±10% (mm)   | 0.25                     |
| Number of waves  | 3                        |
| Approximate free height (mm)   | 3.2                      |
| Working height H for CN bearing preload must be between H1 and H2 (mm)   | between 1,30 and 0,60    |
| Approximate spring rate (N/mm)   | 30                       |