


BORRELLY RONDELLES ONDULÉES





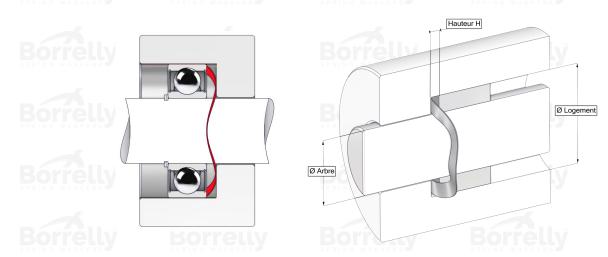

TECHNICAL SHEET CN STANDARD RANGE 1.4310 STAINLESS STEEL FOR BEARING

REFERENCE BORRELLY	CN100S
Outer diameter of the bearing (mm)	100 SPRING WASHERS SPRING WASHERS
Borrelly part code	PDD100085070I10
Material	Stainless steel 1.4310
Standard references for the bearing mounting on outer ring	6013 6211 6309 6400
Operates in Bore Ø min (for application other than	100
bearing preload) (mm)	
Clears Shaft Ø max (for application other than bearing preload) (mm)	82.9
Material thickness ±10% (mm)	0.70
Number of waves	4
Approximate free height (mm)	5.0
Working height H for CN bearing preload must be between H1 and H2 (mm)	between 2,40 and 1,80
Approximate spring rate (N/mm)	74

Approximate spring rate (N/mm) 74

Borrelly Borrelly Borrelly Borrelly Borrelly

Borrelly Borrelly Borrelly Borrelly Borrelly

Borrelly Borrelly Borrelly Borrelly Borrelly Borrelly

Borrelly Borrelly Borrelly Borrelly Borrelly