
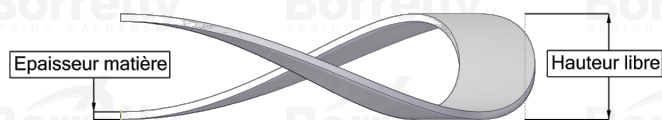


BORRELLY

RONDELLES ONDULÉES

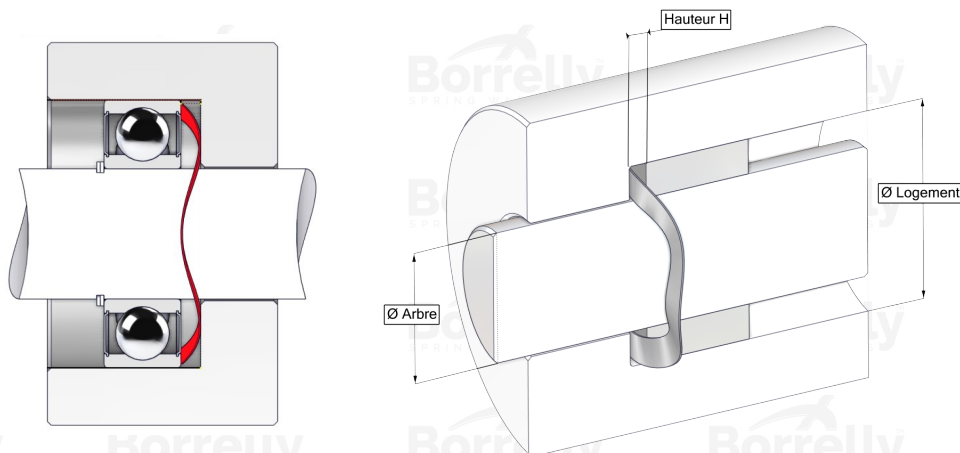

TECHNICAL SHEET CN STANDARD RANGE 1.4310 STAINLESS STEEL FOR BEARING

| REFERENCE BORRELLY | CN310S |
|--|------------------------|
| Outer diameter of the bearing (mm) | 310 |
| Borrelly part code | PDD308278200110 |
| Material | Stainless steel 1.4310 |
| Standard references for the bearing mounting on outer ring | 6040 6234 |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 310 |
| Clears Shaft Ø max (for application other than bearing preload) (mm) | 272.0 |
| Material thickness $\pm 10\%$ (mm) | 2.00 |
| Number of waves | 4 |
| Approximate free height (mm) | 13.8 |
| Working height H for CN bearing preload must be between H1 and H2 (mm) | between 5,40 and 4,00 |
| Approximate spring rate (N/mm) | 108 |