
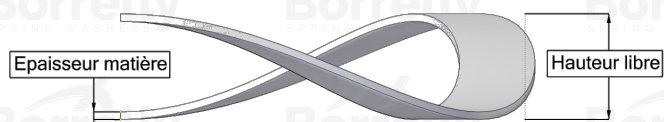
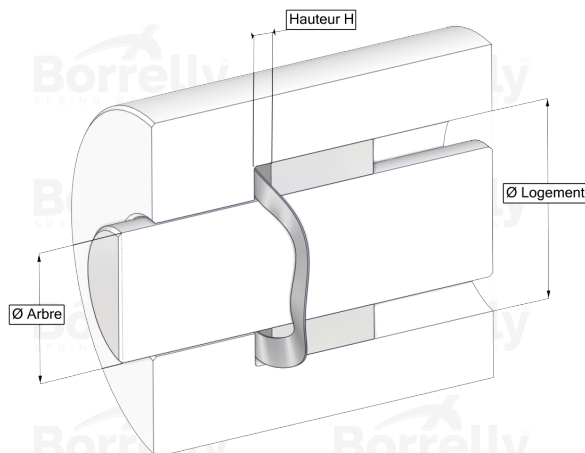


# BORRELLY WAVE WASHERS

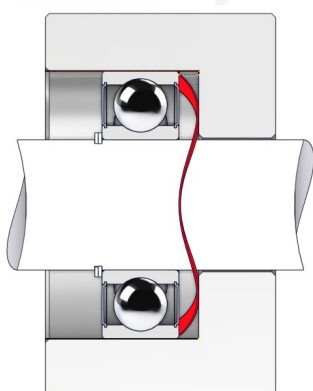

## TECHNICAL SHEET CN STANDARD RANGE 1.4310 STAINLESS STEEL FOR BEARING

| REFERENCE BORRELLY   | CN340S                 |
|--|------------------------|
| Outer diameter of the bearing (mm)                                       | 340                    |
| Borrelly part code   | PDD338308200110        |
| Material   | Stainless steel 1.4310 |
| Standard references for the bearing mounting on outer ring               | 62 386 332             |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 340                    |
| Clears Shaft Ø max (for application other than bearing preload) (mm)     | 301.0                  |
| Material thickness $\pm 10\%$ (mm)                                       | 2.00                   |
| Number of waves  | 4                      |
| Approximate free height (mm)   | 18.5                   |
| Working height H for CN bearing preload must be between H1 and H2 (mm)   | between 5,40 and 4,00  |
| Approximate spring rate (N/mm)   | 84                     |