


## BORRELLY RONDELLES ONDULÉES



Ø Logement



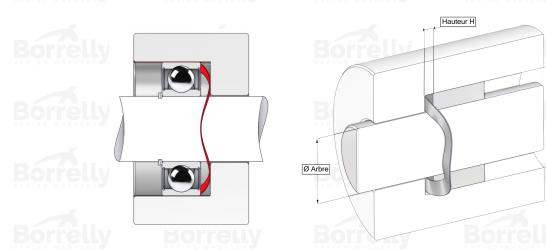

## **TECHNICAL SHEET CN STANDARD RANGE 1.4310 STAINLESS STEEL FOR BEARING**

REFERENCE BORRELLY	CN400S
Outer diameter of the bearing (mm)	400 S SPRING WASHERS SPRING WASHERS
Borrelly part code	PDD398358200I10
Material	Stainless steel 1.4310
Standard references for the bearing mounting on outer ring	6044 6244
Operates in Bore Ø min (for application other than	400
bearing preload) (mm)	
Clears Shaft Ø max (for application other than bearing preload) (mm)	348.0
Material thickness ±10% (mm)	2.00
Number of waves	4
Approximate free height (mm)	23.0
Working height H for CN bearing preload must be between H1 and H2 (mm)	between 5,40 and 4,00
Approximate spring rate (N/mm)	70

Approximate spring rate (N/mm)

Borrelly

Borrelly