


# BORRELLY

## RONDELLES ONDULÉES

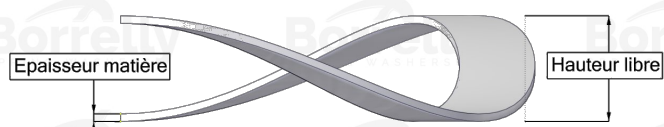

### TECHNICAL SHEET C3 STANDARD RANGE C75S STEEL FOR BEARING

| REFERENCE BORRELLY   | C3130                    |
|--|--------------------------|
| Outer diameter of the bearing (mm)                                       | 130                      |
| Borrelly part code   | PFD129109080XT           |
| Material   | Carbon Steel C75S 1.1248 |
| Standard references for the bearing mounting on outer ring               | 6312 C3                  |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 130                      |
| Clears Shaft Ø max (for application other than bearing preload) (mm)     | 107.0                    |
| Material thickness $\pm 10\%$ (mm)                                       | 0.80                     |
| Number of waves  | 6                        |
| Approximate free height H0 (mm)  | 4.1                      |
| Working height H for C3 bearing preload (mm)                             | 2.0                      |
| Approximate spring rate (N/mm)   | 430                      |