




## BORRELLY **RONDELLES ONDULÉES**










Hauteur H



## **TECHNICAL SHEET C3 PRECISION RANGE 1.4310 STAINLESS STEEL FOR BEARING**

REFERENCE BORRELLY	C3P22S
Outer diameter of the bearing (mm)	22 Borre Di Borre D
Borrelly part code	PCP022017020I10
Material	Stainless steel 1.4310
Standard references for the bearing mounting o outer ring	on EL8-608 C3
Operates in Bore Ø min (for application other th bearing preload) (mm)	an 22
Clears Shaft Ø max (for application other than bearing preload) (mm)	15.8
Material thickness ±10% (mm)	0.20
Number of waves	3
Approximate free height H0 (mm)	IG w 3.1 RS SPRING WASHERS SPRING WASHERST
Working height H (mm)	1.0
Load ±15% (N)	45 Borrelly Borrelly

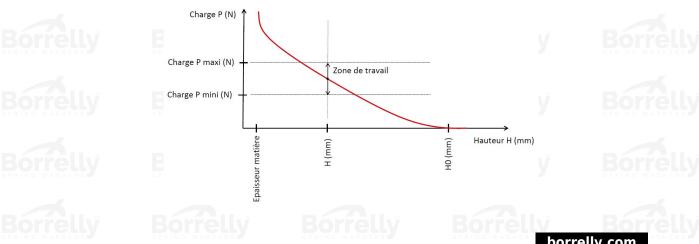

Non-contractual document. Information given for information purposes only. Subject to change

borrelly.com