
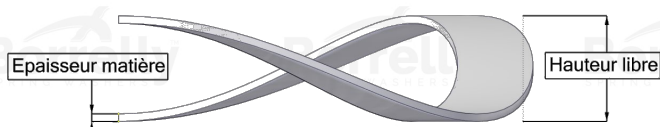
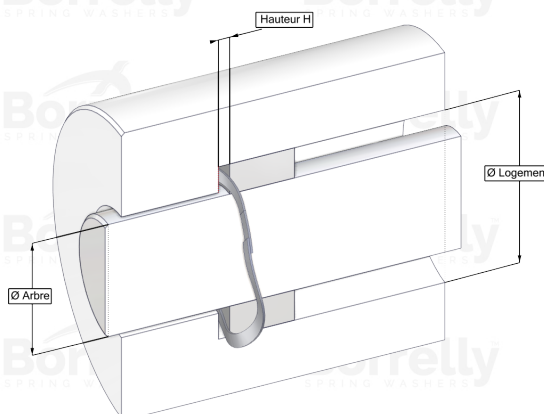


BORRELLY

RONDELLES ONDULÉES

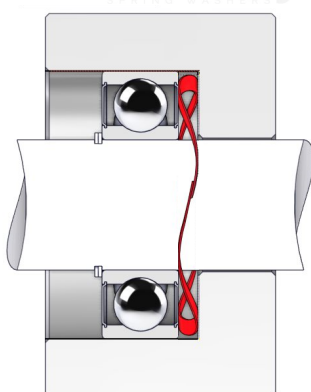

TECHNICAL SHEET STANDARD RANGE SINGLE TURN OVERLAP C75 TYPE STEEL FOR BEARING

| REFERENCE BORRELLY | OJ32 |
|--|-----------------------|
| Outer diameter of the bearing (mm) | 32 |
| Borrelly part code | RD0323J126045XT |
| Material | Carbon Steel type C75 |
| Standard references for the bearing mounting on outer ring | 6002 6201 |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 32 |
| Clears Shaft Ø max (for application other than bearing preload) (mm) | 26.2 |
| Approximate wire section (mm) | 2,6 x 0,45 |
| Number of waves | 3 |
| Approximate free height (mm) | 3.8 |
| Recommended installation height (mm) | 2.00 |
| Approximate spring rate (N/mm) | 51 |
| Minimum working height | 2 wire thickness |