
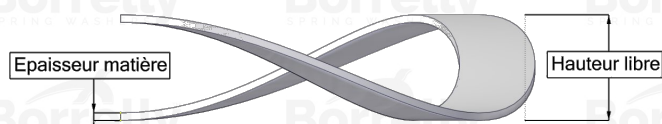
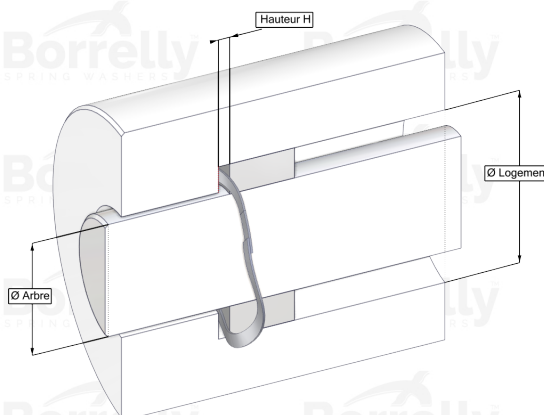


# BORRELLY ONDUFIL WAVE SPRINGS

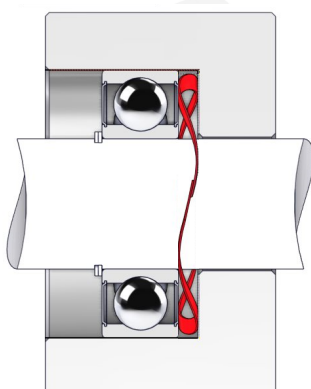

## TECHNICAL SHEET STANDARD RANGE SINGLE TURN OVERLAP C75 TYPE STEEL FOR BEARING

REFERENCE BORRELLY	OJ75
Outer diameter of the bearing (mm)	75
Borrelly part code	RD0754J155070XT
Material	Carbon Steel type C75
Standard references for the bearing mounting on outer ring	6009
Operates in Bore Ø min (for application other than bearing preload) (mm)	75
Clears Shaft Ø max (for application other than bearing preload) (mm)	63.4
Approximate wire section (mm)	5,5 x 0,70
Number of waves	4
Approximate free height (mm)	5.0
Recommended installation height (mm)	2.80
Approximate spring rate (N/mm)	92
Minimum working height	2 wire thickness