
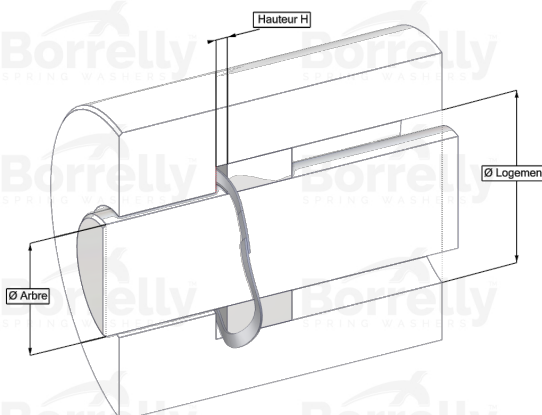


# BORRELLY ONDUFIL WAVE SPRINGS

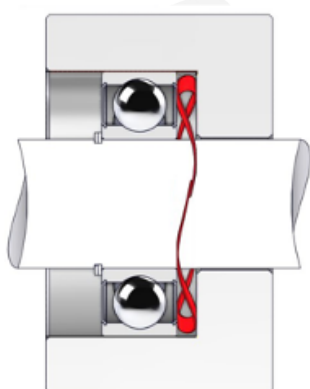

## TECHNICAL SHEET STANDARD RANGE SINGLE TURN OVERLAP 17-7PH STAINLESS STEEL FOR BEARING

REFERENCE BORRELLY	OJ32S
Outer diameter of the bearing (mm)	32
Borrelly part code	RD0323J126045I68
Material	Stainless steel 17-7 Ph 1.4568
Standard references for the bearing mounting on outer ring	6002 6201
Operates in Bore Ø min (for application other than bearing preload) (mm)	32
Clears Shaft Ø max (for application other than bearing preload) (mm)	26.2
Approximate wire section (mm)	2,6 x 0,45
Number of waves	3
Approximate free height (mm)	3.8
Recommended installation height (mm)	2.00
Approximate spring rate (N/mm)	51
Minimum working height	2 wire thickness