
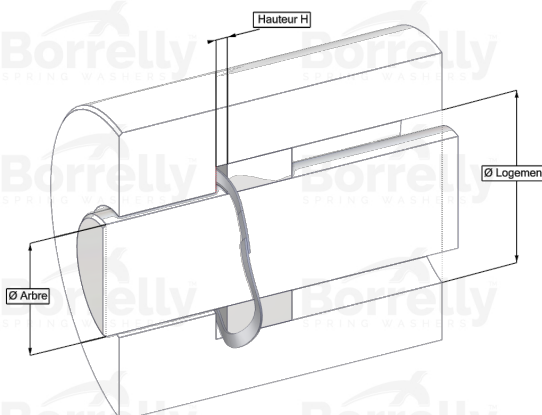


BORRELLY ONDUFIL WAVE SPRINGS

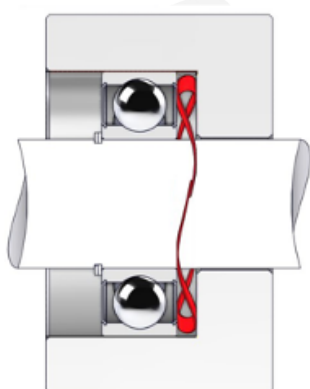

TECHNICAL SHEET STANDARD RANGE SINGLE TURN OVERLAP 17-7PH STAINLESS STEEL FOR BEARING

REFERENCE BORRELLY	OJ62S
Outer diameter of the bearing (mm)	62
Borrelly part code	RD0624J140060I68
Material	Stainless steel 17-7 Ph 1.4568
Standard references for the bearing mounting on outer ring	6007 6206 6305
Operates in Bore Ø min (for application other than bearing preload) (mm)	62
Clears Shaft Ø max (for application other than bearing preload) (mm)	53.4
Approximate wire section (mm)	4,0 x 0,60
Number of waves	4
Approximate free height (mm)	4.1
Recommended installation height (mm)	2.35
Approximate spring rate (N/mm)	91
Minimum working height	2 wire thickness