


## BORRELLY RONDELLES ONDULÉES



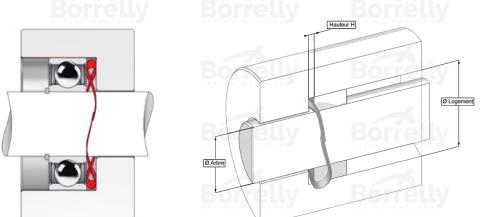

## TECHNICAL SHEET STANDARD RANGE SINGLE TURN OVERLAP 17-7PH STAINLESS STEEL FOR BEARING

REFERENCE BORRELLY	OJ75S		
Outer diameter of the bearing (mm)	ri75 llv Borrellv Borrelly		
Borrelly part code	RD0754J155070I68		
Material	Stainless steel 17-7 Ph 1.4568		
Standard references for the bearing mounting on	6009		
outer ring			
Operates in Bore Ø min (for application other tha	n 75		
bearing preload) (mm)			
Clears Shaft Ø max (for application other than	63.4		
bearing preload) (mm)			
Approximate wire section (mm)	5,5 x 0,70		
Number of waves	4		
Approximate free height (mm)	5.0 sering washers spring washers		
Recommended installation height (mm)	2.80		
Approximate spring rate (N/mm)	92		
Minimum working height	2 wire thickness		

	Borrelly	relly.com