


BORRELLY RONDELLES ONDULÉES



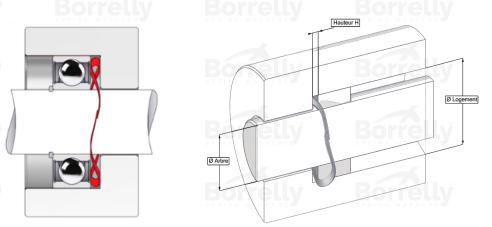

TECHNICAL SHEET STANDARD RANGE SINGLE TURN OVERLAP 17-7PH STAINLESS STEEL FOR BEARING

REFERENCE BORRELLY	OJ115S		
Outer diameter of the bearing (mm)	115 ly Borrelly Borrelly		
Borrelly part code	RD1155J160080I68		
Material	Stainless steel 17-7 Ph 1.4568		
Standard references for the bearing mounting on	60015 6015 61818		
outer ring			
Operates in Bore Ø min (for application other than	115		
bearing preload) (mm)			
Clears Shaft Ø max (for application other than	102.0		
bearing preload) (mm)			
Approximate wire section (mm)	6,0 x 0,80		
Number of waves	5		
Approximate free height (mm)	6.1 RS SPRING WASHERS SPRING WASHERS		
Recommended installation height (mm)	3.20		
Approximate spring rate (N/mm)	112		
Minimum working height	2 wire thickness		

	Borrelly	relly.com