


BORRELLY RONDELLES ONDULÉES

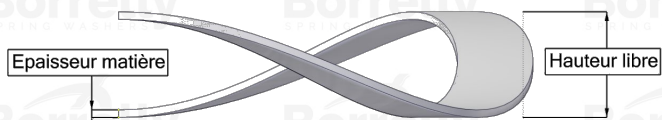

TECHNICAL SHEET CN STANDARD RANGE 1.4310 STAINLESS STEEL FOR BEARING

| REFERENCE BORRELLY | CN360S |
|--|------------------------|
| Outer diameter of the bearing (mm) | 360 |
| Borrelly part code | PDD358328200110 |
| Material | Stainless steel 1.4310 |
| Standard references for the bearing mounting on outer ring | 6240 |
| Operates in Bore Ø min (for application other than bearing preload) (mm) | 360 |
| Clears Shaft Ø max (for application other than bearing preload) (mm) | 321.0 |
| Material thickness ±10% (mm) | 2.00 |
| Number of waves | 4 |
| Approximate free height (mm) | 21.9 |
| Working height H for CN bearing preload must be between H1 and H2 (mm) | between 5,40 and 4,00 |
| Approximate spring rate (N/mm) | 70 |